



Wing AutoLoader



Scaling with Walmart

We are offering drone delivery 7 days a week across multiple Walmart locations in Dallas.

The response has been positive with consumers using our service for anything from a missing ingredient for dinner, to snacks for movie night. At the Frisco Walmart, our regular customers order twice a week, and average flight time is only 5 minutes.







Minutes, not hours or days.



Sophia, Dallas-Fort Worth

Breakfast cereal, cinnamon toast, and milk delivered in 11 mins and 11 seconds.

With Wing's help, Walmart can deliver small items to customers in minutes. This unmatched level of convenience will drive increased sales and retention.

Disclaimer:

Delivery time is based on actual time of delivery from placement of order to delivery of package approximately 1.5 miles from retailer to destination (straight line). The customer's name has been changed to protect their privacy.









Wing³

Confidential and proprietary

Wing

Autoloader Overview







Autoloader Benefits No waiting for the drone

Wing's on premises deployment is easy and requires no ramp up or specialized training.

Our delivery system can lower the cost of delivery for retail, logistics, and healthcare organizations, and is easy to set up and integrate with on-demand delivery apps, e-commerce platforms, and parcel carrier services that people are already using today.






Confidential and proprietary

Autoloader

Set-Up Requirements

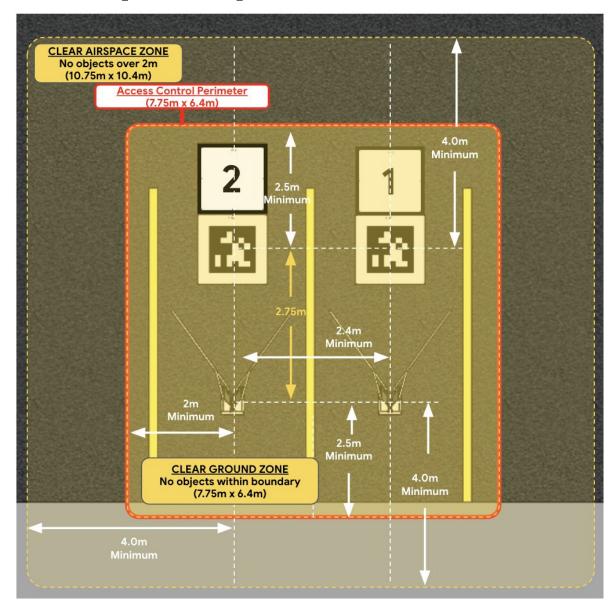



Clear Airspace Zone

- No objects over 2m with 4m (13ft.) of center of fiducial and Autoloader.
- 35.27ft (10.75m) x 34.12ft (10.4m)



Solid Ground

- Should be set on **asphalt or concrete**.
- For soft ground, pouring of a concrete slab would be required.




Level Ground

 Autoloaders shall be installed on level that has no more than a 5% grade or slope of 3 degrees.





Confidential and proprietary

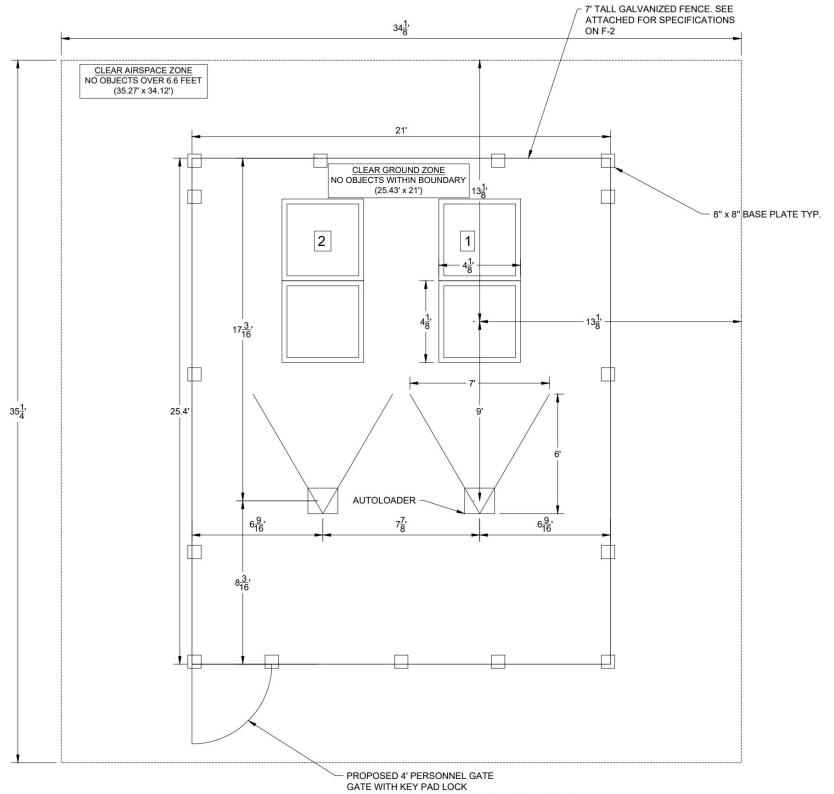



Visuals

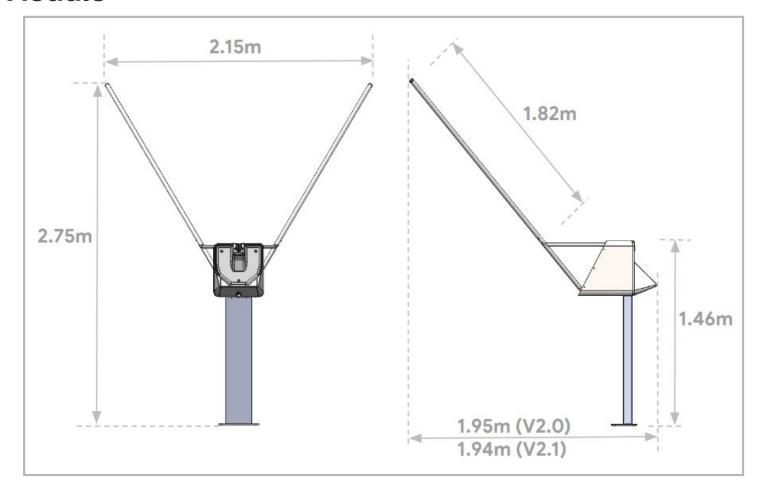

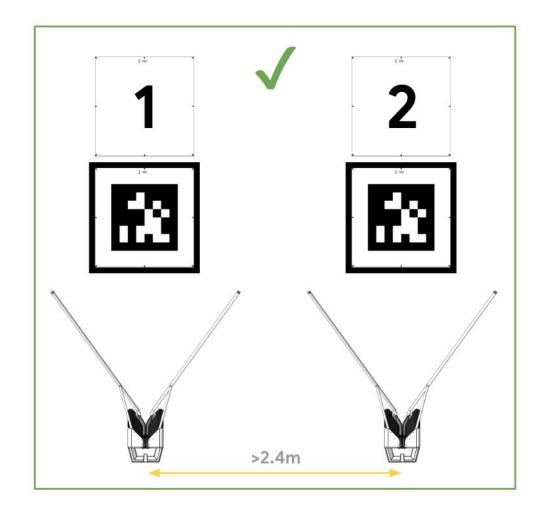

Must be installed with at least 25m clearance from any overhanging structures or vegetation that have a height-to-bottom-of-overhang of 15m or greater.

Autoloader must be >75ft from noise sensitive receivers (e.g. hospital)



9



Thank You! \

Questions?

Connect with us at howdy@wing.com.

