

# Five Star Parks

8651 Airport Fwy North Richland Hills 76810

## Retrofit

10'x20' 9mm double sided display

## Project ID:

Revision 1 - 4/15/25

Project Manager: Joshua Bleigh

Sales Rep: Logan Humphreys





Sign will be installed here:

**Parcel Details**

Parcel ID  
10331212

Parcel Address  
8651 AIRPORT FWY

Parcel Address City  
NORTH RICHLAND HILLS

Parcel Address Zip Code  
76180-7254

**Parcel Highlights**

Full Address  
**8651 Airport Fwy,  
North Richland Hills, TX 76180**

Measurements  
11.55 Acres

Owner  
**AT HOME STORES LLC**

Zoning type  
Commercial




Customer Approval  
Signature:  
Date:

## EXISTING SITE



## PROPOSED DISPLAY

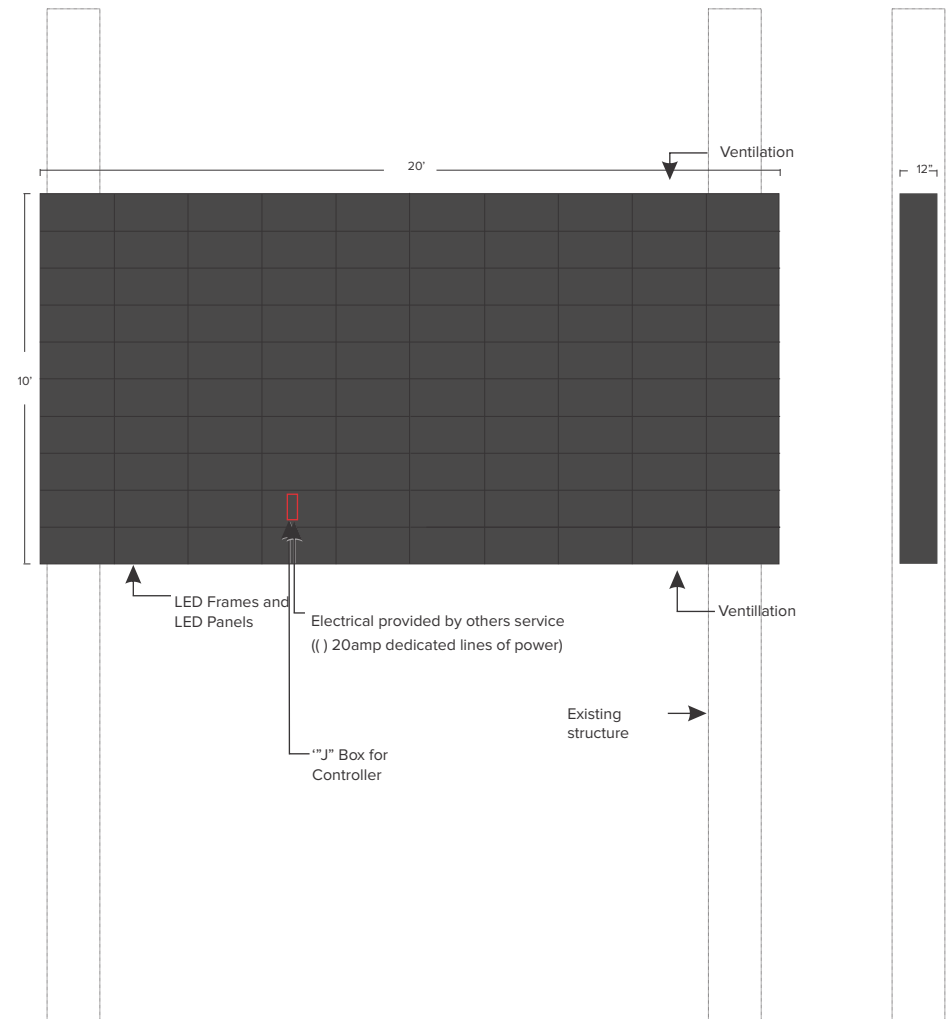

### SCOPE OF WORK:

- Assemble and install 10x20 double sided 9mm Cirrus EMC to existing structure



Cirrus Systems, Inc.  
200 West Rd.  
Portsmouth, NH 03801  
www.cirrusled.com  
877-636-2331

Client Name & Address:

Date:


© Cirrus Systems, Inc. This drawing was created to assist you in visualizing our proposal. The original ideas herein are the property of © Cirrus Systems, Inc. Permission to copy or revise this drawing can only be obtained through a written agreement with © Cirrus Systems, Inc. See your account representative or contact your nearest office.

#### Electrical:


The digital display must be on a separate circuit from the backlit cabinet. Please reference the manual for electrical specifications.

#### Power Requirements:


Volts	Pitch	Mods	Sides	Lines of Power
	9mm	200	2	

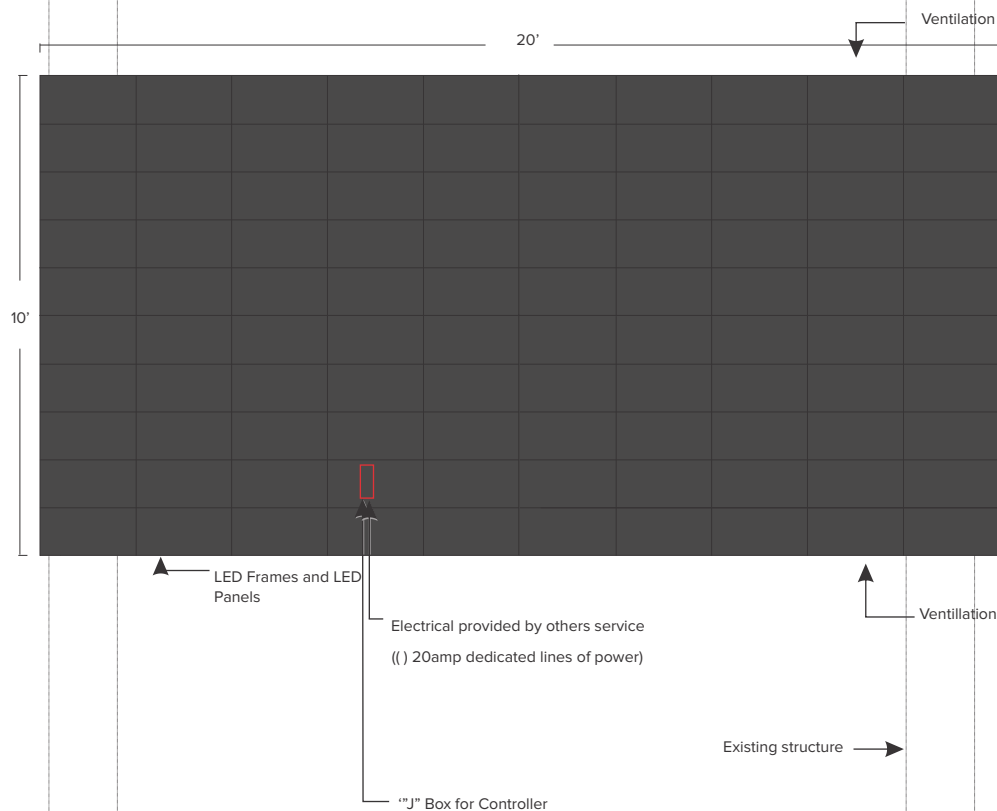



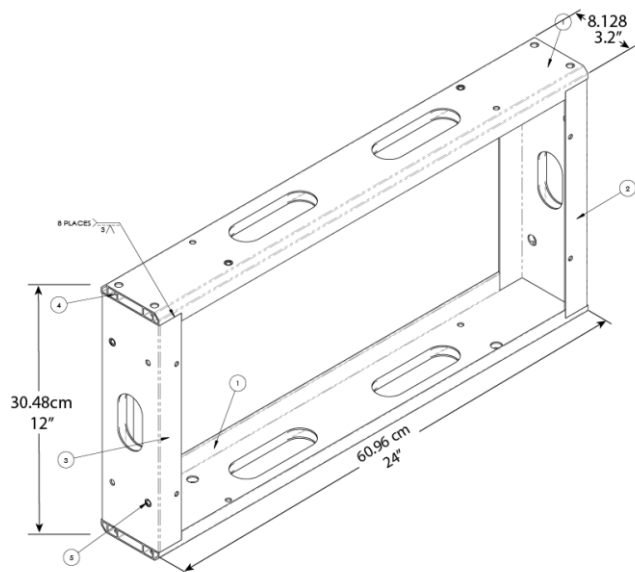

### Static Cabinet Integration

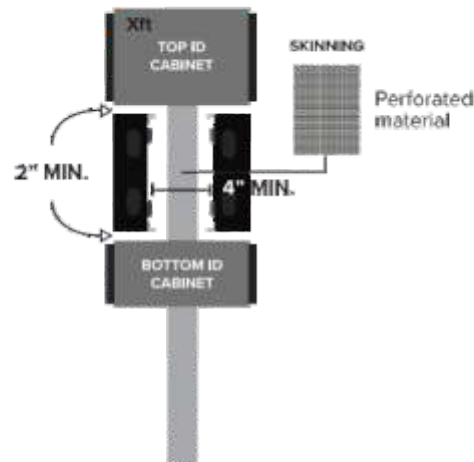


2" MIN. space required on top and bottom of the display required to meet warranty. To increase convection, the sides of the display can be left open or covered with a perforated material.

### Monument or integrated



2" MIN. of space around LED sign



4" MIN. when recessed

### Features

- Solid-state technology
- IP65 rated with built-in power supply
- Future-proof modular architecture
- 24-48 hour turnaround time

### Includes

- Aluminum frames and hex bolts
- LED modules and controller
- Power and data cables
- ScreenHub software + lifetime training & support

### Specs

High-strength extruded aluminum frame


Total: W 24" / H 12" / D 4 1/8" / Weight 11.2 lbs.

Panel: D 7/8" / Weight 6.12 lbs.



COLOR	281 Trillion
RESOLUTION (PITCH)	12, 9, 6, and 4mm
BRIGHTNESS (NITS)	7500
PANEL DIMENSIONS	24"W / 12"H / 4 1/8"D / 11.2 lbs
MODULE MATRIX	12mm 24x48 / 9mm 32x64 / 6mm 48x96 / 4mm 64x128
MAX WATTS PER PANEL	12mm 70W / 9mm 105W, 6mm 115W, 4mm 130W
MIN VIEWING DISTANCE	12mm 20ft / 9mm 12ft / 6mm 8ft / 4mm 4ftv
VIEWING ANGLE	160° Horizontal / 90° Vertical
REFRESH RATE	24-60 FPS (dependant on display size)
AC INPUT	Universal AC input (90-264VAC input range)
TEMPERATURE RATING	-40°-158° Fahrenheit
WIFI CONNECTION	TP Link long-range high power bridge
CELLULAR BROADBAND	5 Year cellular broadband available
DISPLAY LIFE SPAN	100,000 Hours
WARRANTY	5-year limited hardware / 5-year service (optional)
APPROVALS	FCC, UL 897, CAN/CSA-C22.2 No 207-M89

# Your New Cirrus Display

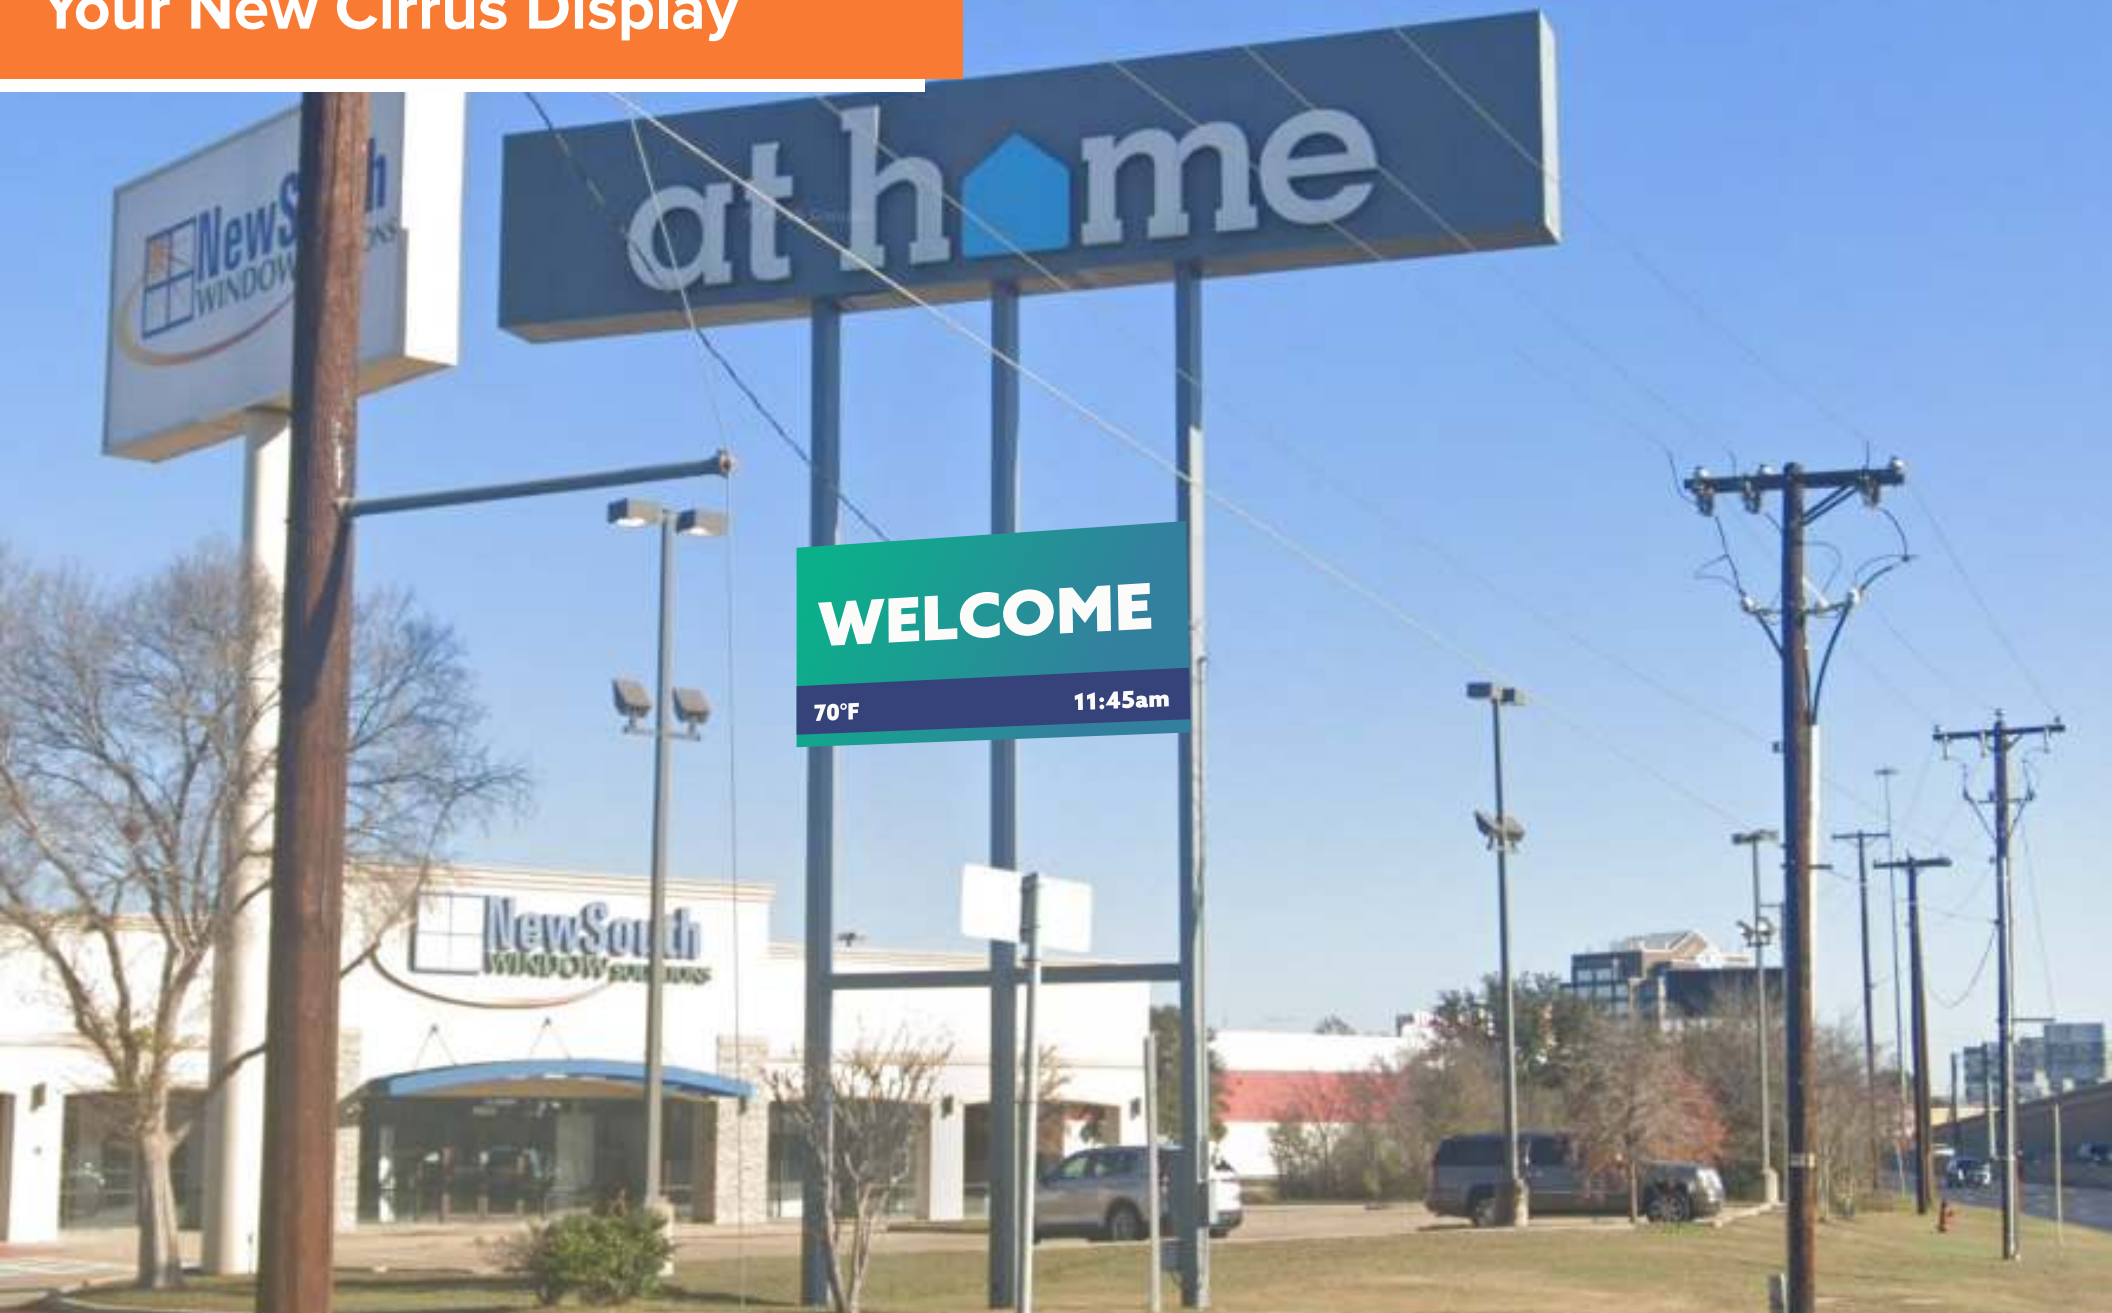

Cirrus Systems 200 West Rd. Portsmouth, NH 03801  
Tel (877) 636-2331 Email [info@cirrusled.com](mailto:info@cirrusled.com)

**Five Star Parks - Retrofit**  
8651 Airport Fwy North Richland Hills 76810

***Thank You!***