


PLOTTED BY:
PLOT DATE:
LOCATION:

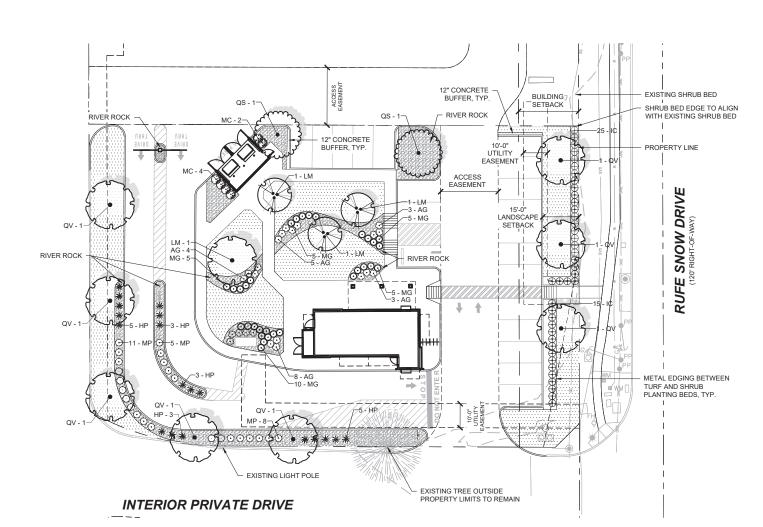

PLANT SCHEDULE

	FLAIN	INI_SCIEDULE							
	TREES	CODE	QTY	BOTANICAL / COMMON NAME	CONT	CAL	SIZE		
		LM	3	LAGERSTROEMIA INDICA X FAURIEI 'MUSKOGEE' MUSKOGEE CRAPE MYRTLE	CONT.	3-5 CANES, 2" CAL OVERALL			
E	·	QS	2	QUERCUS SHUMARDII SHUMARD RED OAK	CONT.	3" CAL.	12` HT MIN		
		QV	9	QUERCUS VIRGINIANA SOUTHERN LIVE OAK	CONT.	3" CAL.	12` HT MIN		
	SHRUBS	CODE	QTY	BOTANICAL / COMMON NAME	CONT	SPACING			
	\odot	AG	23	ABELIA X GRANDIFLORA GLOSSY ABELIA	3 GAL	SEE PLAN			
	*	HP	19	HESPERALOE PARVIFLORA RED YUCCA	3 GAL	SEE PLAN			
	\otimes	IC	40	ILEX CORNUTA 'CARISSA' CARISSA HOLLY	3 GAL	3. OC			
	3 N	MC	6	MYRICA CERIFERA WAX MYRTLE	3 GAL	SEE PLAN	GROUNDCOVER SCHEDULE		
		IVIC					GROUND COVERS	CODE	BOTANICAL / COMMON NAME
	0	MG	30	MUHLENBERGIA CAPILLARIS 'GULF COAST' GULF COAST PINK MUHLY GRASS	3 GAL	SEE PLAN	60000 100000 1000000	RR	2"-3" NATIVE RIVER ROCK SUBMIT SAMPLE FOR APPROVAL
	\odot	MP	24	MYRICA PUSILLA DWARF SOUTHERN WAX MYRTLE	3 GAL	SEE PLAN	SOD/SEED	CODE	BOTANICAL / COMMON NAME

LANDSCAPE CALCULATIONS

LANDSCAPE AREA PERCENTAGE

27.013 SF LANDSCAPE AREA REQUIRED (15% OF SITE AREA): 4,052 SF

7,669 SF (28.4% OF SITE AREA) LANDSCAPE AREA PROVIDED

LANDSCAPE SETBACK

LANDSCAPE SETBACK REQUIRED: LANDSCAPE SETBACK PROVIDED: TREES REQUIRED (1 PER 50 LF): 15' MINIMUM

SHRUBS REQUIRED (10 PER 50 LF):

PARKING LOT SCREENING

TREES PROVIDED:

SHRUBS REQUIRED (SOLID SCREEN) 40 (3' ON CENTER) SHRUBS PROVIDED: 40 (3' ON CENTER)

PARKING LOT LANDSCAPING

(5% OF PARKING): 355 SF (7,102 SF PARKING AREA) 536 SF (7.5%) LANDSCAPE AREA PROVIDED:

TREES REQUIRED (1 PER 20 SPACES): 2 (21 SPACES) TREES PROVIDED: -PROVIDED

ALL SPACES WITHIN 100' OF A LARGE TREE: ONE LARGE TREE IN EACH ISLAND: PROVIDED (EXCLUDING ISLAND WITH UTILITY EASEMENT)

BUFFER YARD REGULATIONS
N/A - ALL ADJACENT PROPERTIES MATCH ZONING AND USE

IRRIGATION NOTE

AN IRRIGATION SYSTEM INCLUDING RAIN AND FREEZE SENSOR CONTROLS WILL BE PROVIDED FOR

ROOT BARRIERS

THE CONTRACTOR SHALL INSTALL ROOT BARRIERS NEAR ALL NEWLY-PLANTED TREES THAT ARE LOCATED WITHIN FIVE (5) FEET OF PAVING OR CURBS. ROOT BARRIERS SHALL BE "CENTURY" OR "DEEP-ROOT" 24" DEEP PANELS (OR EQUAL). BARRIERS SHALL BE LOCATED IMMEDIATELY ADJACENT TO HARDSCAPE. INSTALL PANELS PER MANUFACTURER'S RECOMMENDATIONS. UNDER NO CIRCUMSTANCES SHALL THE CONTRACTOR USE ROOT BARRIERS OF A TYPE THAT COMPLETELY ENCIRCLE THE ROOTBALL

MULCHES

CONT SIZE

CONT

4" DEPTH

CYNODON DACTYLON 'TIF 419' TIF 419 BERMUDA GRASS

AFTER ALL PLANTING IS COMPLETE, CONTRACTOR SHALL INSTALL 3" THICK LAYER OF 1-1/2" SHREDDED WOOD MULCH IN ALL PLANTING AREAS (EXCEPT FOR TURF AREAS AND AREAS NOTED TO STREEDED WOOD WICLEN THAT PLANTING AREAS (EXCEPT FOR TORE AREAS AND AREAS OF THE RECEIVE BUILL ROCK). CONTRACTOR SHALL SUBMIT SAMPLES OF ALL MULCHES TO OWNER FOR APPROVAL PRIOR TO CONSTRUCTION. ABSOLUTELY NO EXPOSED GROUND SHALL BE LEFT SHOWING ANYWHERE ON THE PROJECT AFTER MULCH HAS BEEN INSTALLED.

PLANTING AND IRRIGATION GUARANTEE

THE LANDSCAPE CONTRACTOR SHALL GUARANTEE THAT ALL NEWLY INSTALLED AND EXISTING PLANTS SHALL SURVIVE FOR ONE YEAR AFTER FINAL OWNER ACCEPTANCE OF THE INSTALLATION WORK. THE CONTRACTOR SHALL ALSO BE RESPONSIBLE FOR APPROPRIATE WATERING OF THE LANDSCAPE THROUGH INSTALLATION OF A PROPERLY DESIGNED IRRIGATION SYSTEM. THE OWNER SHALL APPROVE THE SYSTEM DESIGN BEFORE INSTALLATION OF PLANTS OR IRRIGATION.

CITY LANDSCAPE MAINTENANCE STANDARDS

- ALL REQUIRED LANDSCAPE AREAS SHALL BE PERMANENTLY MAINTAINED AND SHALL BE IRRIGATED WITH AN AUTOMATIC CONVENTIONAL IRRIGATION SYSTEM EQUIPPED WITH RAIN AND FREEZE SENSOR CONTROLS. THE IRRIGATION SYSTEM SHALL BE INSTALLED BY A LICENSED IRRIGATOR OR MASTER PLUMBER
- LANDSCAPE ISLANDS SHALL BE IRRIGATED AS REQUIRED BY THIS SECTION. IRRIGATION OF ALL LANDSCAPED AREA ADJACENT TO ANY PARKING AND/OR DRIVING SURFACES SHALL BE INSTALLED SUCH THAT A MINIMUM AMOUNT OF WATER IS APPLIED TO PARKING AND/OR DRIVING
- IRRIGATION SYSTEMS MAY BE BURIED ON PUBLIC STREET RIGHT-OF-WAY; HOWEVER, THE CITY OR ANY FRANCHISED UTILITY WILL NOT BE RESPONSIBLE FOR DAMAGE TO ANY LANDSCAPING
- MATERIAL OR EQUIPMENT WHILE NOT BE RESPONSIBLE FOR DAMAGE TO AN EARDSCAPEN.

 LANDSCAPED AREAS SHALL BE KEPT FREE OF TRASH, LITTER, WEEDS, AND OTHER SUCH MATERIAL OR PLANTS THAT ARE NOT A PART OF THE LANDSCAPING.
- MATERIAL OF PARTY THAT ARE NOT A PARTY OF THE LANGUAGE.

 ALL PLANT MATERIALS SHALL BE MAINTAINED IN A HEALTHY AND GROWING CONDITION AS APPROPRIATE FOR THE SEASON OF THE YEAR. THE PROPERTY OWNER IS RESPONSIBLE FOR REGULAR WEEDING, MOWING OF GRASS, IRRIGATION, FERTILIZING, PRUNING, AND OTHER MAINTENANCE OF ALL PLANTINGS AS NEEDED.
- PLANT MATERIALS WHICH DIE SHALL BE REPLACED BY THE OWNER WITHIN A SIX-MONTH PERIOD WITH PLANT MATERIAL OF SIMILAR VARIETY AND SIZE.

GENERAL GRADING AND PLANTING NOTES

- BY SUBMITTING A PROPOSAL FOR THE LANDSCAPE PLANTING SCOPE OF WORK, THE CONTRACTOR CONFIRMS THAT HE HAS READ, AND WILL COMPLY WITH, THE ASSOCIATED NOTES, SPECIFICATIONS, AND DETAILS WITH THIS PROJECT
- WITH THIS PROJECT.

 THE GENERAL CONTRACTOR IS RESPONSIBLE FOR REMOVING ALL EXISTING VEGETATION (EXCEPT WHERE NOTED TO REMAIN).

 IN THE CONTEXT OF THESE PLANS, NOTES, AND SPECIFICATIONS,
- "FINISH GRADE" REFERS TO THE FINAL ELEVATION OF THE SOIL SURFACE (NOT TOP OF MULCH) AS INDICATED ON THE GRADING PLANS.
- BEFORE STARTING WORK, THE LANDSCAPE CONTRACTOR SHALL VERIFY THAT THE ROUGH GRADES OF ALL LANDSCAPE AREAS ARE WITHIN +/-0.1' OF FINISH GRADE. SEE SPECIFICATIONS FOR MORE DETAILED INSTRUCTION ON TURF AREA AND PLANTING BED PREPARATION
- PREFARATION.

 CONSTRUCT AND MAINTAIN FINISH GRADES AS SHOWN ON GRADING PLANS, AND CONSTRUCT AND MAINTAIN SLOPES AS RECOMMENDED BY THE GEOTECHNICAL REPORT. ALL LANDSCAPE AREAS SHALL HAVE POSITIVE DRAINAGE AWAY FROM STRUCTURES AT THE MINIMUM SLOPE SPECIFIED IN THE REPORT AND ON THE GRADING PLANS, AND AREAS OF POTENTIAL PONDING SHALL BE REGRADED TO BLEND IN WITH THE SURROUNDING GRADES AND
- REGRADED TO BLEND IN WITH THE SURROUNDING GRADES AND ELIMINATE PONDING POTENTIAL.

 THE LANDSCAPE CONTRACTOR SHALL DETERMINE WHETHER OR NOT THE EXPORT OF ANY SOIL WILL BE NEEDED, TAKING INTO ACCOUNT THE ROUGH GRADE PROVIDED, THE AMOUNT OF SOIL AMENDMENTS TO BE ADDED (BASED ON A SOIL TEST, PER SPECIFICATIONS), AND THE FINISH GRADES TO BE ESTABLISHED.
- AFTER INSTALLING SOIL AMENDMENTS IN SHRUB AREAS, AND IN ORDER TO ALLOW FOR PROPER MULCH DEPTH, ENSURE THAT THE FINISH GRADE IMMEDIATELY ADJACENT TO WALKS AND OTHER WALKING SURFACES IS 3" BELOW FINISH GRADE. TAPERING TO WEET FINISH GRADE AT APPROXIMATELY 18" AWAY FROM THE SURFACE.

 AFTER INSTALLING SOIL AMENDMENTS IN TURF AREAS, ENSURE
- THAT THE FINISH GRADE IN TURE AREAS IMMEDIATELY ADJACENT TO WALKS AND OTHER WALKING SURFACES IS 1" BELOW FINISH GRADE, TAPERING TO MEET FINISH GRADE AT APPROXIMATELY 18" AWAY FROM THE SURFACE.
- AWAT FROM THE SURFACE.

 SHOULD ANY CONFLICTS AND/OR DISCREPANCIES ARISE BETWEEN THE GRADING PLANS, GEOTECHNICAL REPORT, THESE NOTES AND PLANS, AND ACTUAL CONDITIONS, THE CONTRACTOR SHALL IMMEDIATELY BRING SUCH ITEMS TO THE ATTENTION OF THE LANDSCAPE ARCHITECT, GENERAL CONTRACTOR, AND OWNER.
 ALL PLANT LOCATIONS ARE DIAGRAMMATIC. ACTUAL LOCATIONS SHALL
- BE VERIFIED WITH THE LANDSCAPE ARCHITECT OR DESIGNER PRIOR TO PLANTING. THE LANDSCAPE CONTRACTOR SHALL ENSURE THAT ALL REQUIREMENTS OF THE PERMITTING AUTHORITY ARE MET (I.E., MINIMUM PLANT QUANTITIES, PLANTING METHODS, TREE PROTECTION METHODS,
- THE LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR DETERMINING PLANT QUANTITIES; PLANT QUANTITIES SHOWN ON LEGENDS AND CALLOUTS ARE FOR GENERAL INFORMATION ONLY IN THE EVENT OF A DISCREPANCY BETWEEN THE PLAN AND THE PLANT LEGEND, THE PLANT QUANTITY AS SHOWN ON THE PLAN (FOR INDIVIDUAL SYMBOLS) OR CALLOUT (FOR GROUNDCOVER PATTERNS) SHALL TAKE PRECEDENCE
- PATTERNS) SHALL TAKE PRECEDENCE.

 NO SUBSTITUTIONS OF PLANT MATERIALS SHALL BE ALLOWED WITHOUT THE WRITTEN PERMISSION OF THE LANDSCAPE ARCHITECT. IF SOME OF THE PLANTS ARE NOT AVAILABLE, THE LANDSCAPE CONTRACTOR SHALL NOTIFY THE LANDSCAPE ARCHITECT IN WRITING (VIA PROPER CHANNELS).

 THE CONTRACTOR SHALL, AT A MINIMUM, PROVIDE
- REPRESENTATIVE PHOTOS OF ALL PLANTS PROPOSED FOR THE PROJECT. THE CONTRACTOR SHALL ALLOW THE LANDSCAPE ARCHITECT AND THE OWNER/OWNER'S REPRESENTATIVE TO INSPECT, AND APPROVE OR REJECT, ALL PLANTS DELIVERED TO THE JOBSITE. REFER TO SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS FOR SUBMITTALS.

 THE CONTRACTOR SHALL MAINTAIN THE LANDSCAPE IN A HEALTHY
- CONDITION FOR 90 DAYS AFTER ACCEPTANCE BY THE OWNER. REFER



EVERGREEN

CASE SUP 2021-04

PROJECT BENCHMARKS: TBM #1- X CUT ON EX STORM INLET IN RUFE SNOW DR. APPX 60' NORTH AND 19' FAST OF NORTHERNMOST SOUTHEASTERN PROPERT CORNER. ELEV: 629.02

TBM #2- X CUT ON EX CURB IN LEWIS DR. APPX 39' WEST AND 20' SOUTH OF SOUTHERWESTERN PROPERT CORNER. ELEV: 632.96

LP-1

PLAN

LANTING

CAPI

LANDS

ENGINEERING

A

COFFEE

(1)

BROTHER

5205 RUFE SNOW DRIVE NORTH RICHLAND HILLS,

NOTE:
THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES AS SHOWN ON THESE PLANS IS BASED ON DESIGN DRAWINGS, RECORDS OF THE VARIOUS UTILITY COMPANIES, AND WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THE DESIGNER DOES NOT GUARANTEE THAT LOCATIONS SHOWN ARE EXACT. THE CONTRACTOR MUST CONTRACT THE APPROPRIED UTILITY COMPANIES AT LEAST? HOURS BEFORE ANY EXCAVATIONTO REQUEST EXACT FIELD LOCATIONS OF UTILITIES, AS SUCH. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATION AND UNCOVERING EXISTING UTILITIES IN THE VICINITY OF THE PROPOSED IMPROVEMENTS AND UTILITY CONNECTION POINTS PRIOR TO THE START OF CONSTRUCTION TO ASCEPTAN EXACT MATERIALS, LOCATIONS, ELEVATIONS, ETC. AND THEIR POTENTIAL CONFLICT WITH PROPOSEI MIRROUGHERS AS PROPORTIES BEFORE PROCEEDING WITH WORK.

TO SPECIFICATIONS FOR CONDITIONS OF ACCEPTANCE FOR THE START OF THE MAINTENANCE PERIOD, AND FOR FINAL ACCEPTANCE AT THE END OF THE MAINTENANCE PERIOD SEE SPECIFICATIONS AND DETAILS FOR FURTHER REQUIREMENTS.

- QUALIFICATIONS OF LANDSCAPE CONTRACTOR

 1. ALL LANDSCAPE WORK SHOWN ON THESE PLANS SHALL BE PERFORMED BY A SINGLE FIRM SPECIALIZING IN LANDSCAPE PLANTING.

 2. A LIST OF SUCCESSFULLY COMPLETED PROJECTS OF THIS TYPE, SIZE AND NATURE MAY BE REQUESTED BY THE OWNER FOR FURTHER QUALIFICATION MEASURES.

 3. THE LANDSCAPE CONTRACTOR SHALL HOLD A VALID NURSERY AND FLORAL CERTIFICATE ISSUED BY THE TEXAS DEPARTMENT OF AGRICULTURE, AS WELL AS OPERATE UNDER A COMMERCIAL PESTLICITE ADDICATOR LICENSE ISSUED BY THE TEXAS DEPARTMENT OF AGRICULTURE, AS WELL AS OPERATE UNDER A COMMERCIAL PESTLICITE ADDICATOR LICENSE ISSUED BY ETHER THE TEXAS DEPARTMENT OF AGRICULTURE ADDICATOR LICENSE ISSUED BY ETHER THE TEXAS DEPARTMENT OF AGRICULTURE ADDICATOR LICENSE ISSUED BY ETHER THE TEXAS DEPARTMENT OF AGRICULTURE OF A COMMERCIAL PESTLICITE AND ICATOR ISSUED BY SITHED THE TEXAS DEPARTMENT OF AGRICULTURE OF A COMMERCIAL PESTLICITE AND ICATOR ISSUED BY ETHER THE TEXAS DEPARTMENT OF AGRICULTURE OF A COMMERCIAL PESTLICITE AND ICATOR ISSUED BY ETHER THE TEXAS DEPARTMENT OF AGRICULTURE OF A COMMERCIAL PESTLICITE AND ICATOR OF A COMMERCIAL PESTLICITE AN
- PESTICIDE APPLICATOR LICENSE ISSUED BY EITHER THE TEXAS DEPARTMENT OF AGRICULTURE OR THE TEXAS STRUCTURAL PEST CONTROL BOARD.
- SCOPE OF WORK

 1. WORK COVERED BY THESE SECTIONS INCLUDES THE FURNISHING AND PAYMENT OF ALL MATERIALS, LABOR, SERVICES, EQUIPMENT, LICENSES, TAXES AND ANY OTHER ITEMS THAT ARE NECESSARY FOR THE EXECUTION, INSTALLATION AND COMPLETION OF ALL WORK, SPECIFIED HEREIN AND /OR SHOWN ON THE LANDSCAPE PLANS, NOTES, AND DETAILS.
- HEREIN AND / OR SHOWN ON THE LANDSCAPE PLANS, NOTES, AND DETAILS.
 ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH ALL APPLICABLE LAWS, CODES AND REGULATIONS REQUIRED BY AUTHORITIES HAVING JURISDICTION OVER SUCH WORK, INCLUDING ALL INSPECTIONS AND PERMITS REQUIRED BY FEDERAL, STATE AND LOCAL AUTHORITIES IN SUPPLY, TRANSPORTATION AND INSTALLATION OF MATERIALS.
 THE LANDSCAPE CONTRACTOR SHALL VERIFY THE LOCATION OF ALL UNDERGROUND UTILITY LINES (WATER, SEWER, ELECTRICAL, TELEPHONE, GAS, CABLE, TELEVISION, ETC.) PRIOR TO THE STATT OF ANY WORK

PRODUCTS

- ALL MANUFACTURED PRODUCTS SHALL BE NEW.
 CONTAINER AND BALLED-AND-BURLAPPED PLANTS:
 1. FURNISH NURSERY-GROWN PLANTS COMPLYING WITH ANSI Z60.1-2014. PROVIDE WELL-SHAPED,
 FULLY BRANCHED, HEALTHY, VIGOROUS STOCK FREE OF DISEASE, INSECTS, EGGS, LARVAE, AND
 DEFECTS SUCH AS KNOTS, SUN SCALD, INJURIES, ABRASIONS, AND DISFIGUREMENT. ALL PLANTS
 WITHIN A SPECIES SHALL HAVE SIMILAR SIZE, AND SHALL BE OF A FORM TYPICAL FOR THE SPECIES.
 ALL TORSES SHALL BE OF DATAINSTO BEOM SCULPES WITHIN 30 MILE SO FET MED BY DESTITE AND ALL TREES SHALL BE OBTAINED FROM SOURCES WITHIN 200 MILES OF THE PROJECT SITE, AND WITH SIMILAR CLIMACTIC CONDITIONS.
- ROOT SYSTEMS SHALL BE HEALTHY DENSELY BRANCHED ROOT SYSTEMS NON-POT-BOUND FREE FROM ENCIRCLING AND/OR GIRDLING ROOTS, AND FREE FROM ANY OTHER ROOT DEFECTS (SUCH
- AS J-SHAPED ROUTS).

 ANY PLANT DEFMED LINACCEPTABLE BY THE LANDSCAPE ARCHITECT OR OWNER SHALL BE ANY PLANT DEEMED UNACCEPTABLE BY THE LANDSCAPE ARCHITECT OR OWNER SHALL BE IMMEDIATELY REMOVED FROM THE SITE AND SHALL BE REPLACED WITH AN ACCEPTISE PLANT OF LIKE TYPE AND SIZE AT THE CONTRACTOR'S OWN EXPENSE. ANY PLANTS APPEARING TO BE UNHEALTHY, EVEN IF DETERMINED TO STILL BE ALIVE, SHALL NOT BE ACCEPTED. THE LANDSCAPE ARCHITECT AND OWNER SHALL BE THE SOLE JUDGES AS TO THE ACCEPTABILITY OF PLANT MATERIAL. ALL TREES SHALL BE STANDARD IN FORM, UNLESS OTHERWISE SPECIFIED. TREES WITH CENTRAL LEADERS WILL NOT BE ACCEPTED IF LEADER IS DAMAGED OR REMOVED. PRUNE ALL DAMAGED TWIGS AFTER PLANTING.
- TWIGS AFTER PLANTING.
 CALIPER MEASUREMENTS FOR STANDARD (SINGLE TRUNK) TREES SHALL BE AS FOLLOWS: SIX INCHES ABOVE THE ROOT FLARE FOR TREES UP TO AND INCLUDING FOUR INCHES IN CALIPER, AND TWELVE INCHES ABOVE THE ROOT FLARE FOR TREES EXCEEDING FOUR INCHES IN CALIPER. MULTI-TRUNK TREES SHALL BE MEASURED BY THEIR OVERALL HEIGHT, MEASURED FROM THE TOP
- OF THE ROOT BALL. ANY TREE OR SHRUB SHOWN TO HAVE EXCESS SOIL PLACED ON TOP OF THE ROOT BALL SO THAT
- 7. ANY TREE OR SHRUB SHOWN TO HAVE EXCESS SOIL PLACED ON TOP OF THE ROOT BALL, SO THAT THE ROOT FLARE HAS BEEN COMPLETELY COVERED, SHALL BE REJECTED.
 SOD: PROVIDE WELL-ROOTED SOD OF THE VARIETY NOTED ON THE PLANS. SOD SHALL BE CUT FROM HEALTHY, MATURE TURE WITH SOIL THICKNESS OF 34" TO 1". EACH PALLET OF SOD SHALL BE ACCOMPANIED BY A CERTIFICATE FROM SUPPLIER STATING THE COMPOSITION OF THE SOD.
 SEED: PROVIDE BLEND OF SPECIES AND VARIETIES AS NOTED ON THE PLANS, WITH MAXIMUM PERCENTAGE OF VIETTY, GERMINATION, AND MINIMUM PERCENTAGE OF WEDE SEED AS INDICATED ON PLANS. EACH BAG OF SEED SHALL BE ACCOMPANIED BY A TAG FROM THE SUPPLIER INDICATING THE COMPOSITION OF THE SEFD.
- TOPSOIL: SANDY TO CLAY LOAM TOPSOIL, FREE OF STONES LARGER THAN •INCH, FOREIGN MATTER,
- COMPOST: WELL-COMPOSTED, STABLE, AND WEED-FREE ORGANIC MATTER, pH RANGE OF 5.5 TO 8; MOISTURE CONTENT 35 TO 55 PERCENT BY WEIGHT; 100 PERCENT PASSING THROUGH 3/4-INCH SIEVE; SOLUBLE SALT CONTENT OF 5 TO 10 DECISIEMENS/M; NOT EXCEEDING 0.5 PERCENT INERT CONTAMINANTS AND FREE OF SUBSTANCES TOXIC TO PLANTINGS. NO MANURE OR ANIMAL-BASED PRODUCTS SHALL BE USED.
- FERTILIZER: GRANUI AR FERTILIZER CONSISTING OF NITROGEN PHOSPHORUS POTASSIUM AND OTHER FERTILIZER: GRANULAR FERTILIZER CONSISTING OF NITROGEN, PHOSPHORUS, POTASSIUM, AND OTHER NUTRIENTS IN PROPORTIONS, AMDURITS, AND RELEASE RATES RECOMMENDED IN A SOIL REPORT FROM A QUALIFIED SOIL-TESTING AGENCY (SEE BELOW). MULCH: SIZE AND TYPE AS INDICATED ON PLANS, FREE FROM DELETERIOUS MATERIALS AND SUITABLE AS A TOP DRESSING OF TREES AND SHRUBS. WEED FABRIC: 5 OUNCE, WOVEN, NEEDLE-PUNCHED FABRIC, SUCH AS DEWITT PROS LANDSCAPE FABRIC (OR APPROVED EQUAL). TREE STAKING AND GUYING.

 TREE STAKING AND GUYING.

- STAKES: 6' LONG GREEN METAL T-POSTS.
- GUY AND TIE WIRE: ASTM A 641, CLASS 1, GALVANIZED-STEEL WIRE, 2-STRAND, TWISTED, 0.106 INCH DIAMETER. DIAMETER.

 STRAP CHAFING GUARD: REINFORCED NYLON OR CANVAS AT LEAST 1-1/2 INCH WIDE, WITH GROMMETS TO PROTECT TREE TRUNKS FROM DAMAGE.

- GROMMETS TO PROTECT TREE TRUNKS FROM DAMAGE.

 STEEL EGBING: PROFESSIONAL STEEL EDGING, 14 GAUGE THICK X 4 INCHES WIDE. FACTORY PAINTED

 DARK GREEN. ACCEPTABLE MANUFACTURERS INCLUDE COLMET OR APPROVED EQUAL

 PRE-EMERGENT HERBICIDES: ANY GRANULAR, NON-STAINING PRE-EMERGENT HERBICIDE THAT IS

 LABELED FOR THE SPECIFIC ORNAMENTALS OR TURF ON WHICH IT WILL BE UTILIZED. PRE-EMERGENT HERBICIDES SHALL BE APPLIED PER THE MANUFACTURER'S LABELED RATES

METHODS

- SOIL PREPARATION
- BEFORE STARTING WORK, THE LANDSCAPE CONTRACTOR SHALL VERIFY THAT THE GRADE OF ALL LANDSCAPE AREAS ARE WITHIN #/0.1" OF FINISH GRADE. THE CONTRACTOR SHALL NOTIFY THE OWNER IMMEDIATELY SHOULD ANY DISCREPANCIES EXIST. SOIL TESTING:
- TESTING:
 AFTER FINISH GRADES HAVE BEEN ESTABLISHED, CONTRACTOR SHALL HAVE SOIL SAMPLES
 TESTED BY AN ESTABLISHED SOIL TESTING LABORATORY FOR THE FOLLOWING: SOIL
 TEXTURAL CLASS, GENERAL SOIL FERTILITY, PH, ORGANIC MATTER CONTENT, SALT (GEC),
 LIME, SODIUM ADSORPTION RATIO (SAR) AND BORON CONTENT. EACH SAMPLE SUBMITTED
 SHALL CONTAIN NO LESS THAN ONE QUART OF SOIL.
 CONTRACTOR SHALL ALSO SUBMIT THE PROJECT'S PLANT LIST TO THE LABORATORY ALONG
 MITTURES ONLY SAMDIES.
- WITH THE SOIL SAMPLES.
- THE SOIL REPORT PRODUCED BY THE LABORATORY SHALL CONTAIN RECOMMENDATIONS FOR THE FOLLOWING (AS APPROPRIATE): GENERAL SOIL PREPARATION AND BACKFILL MIXES, PRE-PLANT FERTILIZER APPLICATIONS, AND ANY OTHER SOIL RELATED ISSUES. THE REPORT SHALL ALSO PROVIDE A FERTILIZER PROGRAM FOR THE ESTABLISHMENT PERIOD AND FOR ONG-TERM MAINTENANCE
- LONG-TERM MAINTENANCE.

 THE CONTRACTOR SHALL INSTALL SOIL AMENDMENTS AND FERTILIZERS PER THE SOILS REPORT RECOMMENDATIONS. ANY CHANGE IN COST DUE TO THE SOIL REPORT RECOMMENDATIONS, EITHER INCREASE OR DECREASE, SHALL BE SUBMITTED TO THE OWNER WITH THE REPORT. FOR BIDDING PURPOSES ONLY, THE SOIL PREPARATION SHALL CONSIST OF THE FOLLOWING:

 TURE: INCORPORATE THE FOLLOWING AMENDMENTS INTO THE TOP 8" OF SOIL BY MEANS OF ROTOTILLING AFTER CROSS-RIPPING:

 NITED/CEN STABILIZED ORGANIC AMENIMENT. A CILLYDS PEP 1 000 S.E.
- NITROGEN STABILIZED ORGANIC AMENDMENT 4 CU, YDS. PER 1,000 S.F.
 PREPLANT TURF FERTILIZER (10-20-10 OR SIMILAR, SLOW RELEASE, ORGANIC) 15 LBS PER
- "CLAY BUSTER" OR EQUAL USE MANUFACTURER'S RECOMMENDED RATE
- TREES, SHRUBS, AND PERENNIALS: INCORPORATE THE FOLLOWING AMENDMENTS INTO THE TOP 8" OF SOIL BY MEANS OF ROTOTILLING AFTER CROSS-RIPPING: NITROGEN STABILIZED ORGANIC AMENDMENT - 4 CU. YDS. PER 1,000 S.F.
- 12-12-12 FERTILIZER (OR SIMILAR, ORGANIC, SLOW RELEASE) 10 LBS. PER CU. YD.

- ii. 12-12-12 FERTILIZER (OR SIMILAR, ORGANIC, SLOW RELEASE) 10 LBS. PER CU. YD.

 iii. "CLAY BUSTER" OR EQUAL. USE MANUFACTURER'S RECOMMENDED RATE

 IV. IRON SULPHATE 2 LBS. PER CU. YD.

 CONTRACTOR SHALL ENSURE THAT THE GRADE IN SOD AREAS SHALL BE 1" BELOW FINISH GRADE

 BEFORE INSTALLING SOIL AMENDMENTS, AND 2" BELOW FINISH GRADE IN SHRUB AREAS BEFORE

 INSTALLING SOIL AMENDMENTS. MULCH COVER WITHIN 6" OF CONCRETE WALKS AND CURBS SHALL

 NOT PROTRUDE ABOVE THE FINISH SURFACE OF THE WALKS AND CURBS. MULCH COVER WITHIN 12"

 OF WALLS SHALL BE AT LEAST 3" LOWER THAN THE TOP OF WALL

 ONCE SOIL PREPARATION IS COMPLETE, THE LANDSCAPE CONTRACTOR SHALL ENSURE THAT

 THERE ARE NO DEBRIS, TRASH, OR STONES LARGER THAN 1" REMAINING IN THE TOP 6" OF SOIL.

- GENERAL PLANTING
- REMOVE ALL NURSERY TAGS AND STAKES FROM PLANTS
- EXCEPT IN AREAS TO BE PLANTED WITH ORNAMENTAL GRASSES, APPLY PRE-EMERGENT HERBICIDES AT THE MANUFACTURER'S RECOMMENDED RATE.
- HERBICIDIES AT THE MANUFACTURER'S RECOMMENDED RATE.

 RENCHING NEAR EXISTING TREES:

 CONTRACTOR SHALL NOT DISTURB ROOTS 1-1/2" AND LARGER IN DIAMETER WITHIN THE CRITICAL ROOT ZONE (CR2) OF EXISTING TREES, AND SHALL EXERCISE ALL POSSIBLE CARE AND PRECAUTIONS TO AVOID INJURY TO TREE ROOTS, TRUNKS, AND BRANCHES. THE CR2 IS DEFINED AS A CIRCULAR AREA EXTREDING OUTWARD FROM THE TREE TRUNK, WITH A RADIUS EQUAL TO 1" FOR EVERY 1" OF TRUNK DIAMETER-AT-BREAST-HEIGHT (4.5" ABOVE THE AVERAGE ORDADE AT THE TRIJINK).
- AVERAGE GRADE AT THE TRUNK). ALL EXCAVATION WITHIN THE CRZ SHALL BE PERFORMED USING HAND TOOLS. NO MACHINE EXCAVATION OR TRENCHING OF ANY KIND SHALL BE ALLOWED WITHIN THE CRZ.
- ALTER ALIGNMENT OF PIPE TO AVOID TREE ROOTS 1-1/2" AND LARGER IN DIAMETER. WHERE TREE ROOTS 1-1/2" AND LARGER IN DIAMETER ARE ENCOUNTERED IN THE FIELD, TUNNEL TINCE ROUTS 1-112 AND LANGER IN DIAMBLER AND ENCOUNTERED IN THE FIELD, HONNEL UNDER SUCH ROOTS, WRAP EXPOSED ROOTS WITH SEVERAL LAYERS OF BURLAR PAND KEEP MOIST. CLOSE ALL TRENCHES WITHIN THE CANOPY DRIP LINES WITHIN 24 HOURS. ALL SEVERED ROOTS SHALL BE HAND PRUNED WITH SHARP TOOLS AND ALLOWED TO AIR-DRY. DO NOT USE ANY SORT OF SEALERS OR WOUND PAINTS.
- TREE PLANTING
- TREE PLANTING HOLES SHALL BE EXCAVATED TO MINIMUM WIDTH OF TWO TIMES THE WIDTH OF THE ROOTBALL, AND TO A DEPTH EQUAL TO THE DEPTH OF THE ROOTBALL LESS TWO TO FOUR
- INCHES.
 SCARIFY THE SIDES AND BOTTOM OF THE PLANTING HOLE PRIOR TO THE PLACEMENT OF THE TREE.
- REMOVE ANY GLAZING THAT MAY HAVE BEEN CAUSED DURING THE EXCAVATION OF THE HOLE. FOR CONTAINER AND BOX TREES, TO REMOVE ANY POTENTIALLY GIRDLING ROOTS AND OTHER ROOT DEFECTS, THE CONTRACTOR SHALL SHAVE A 1" LAVER OFF OF THE SIDES AND BOTTOM OF THE ROOTBALL OF ALL TREES JUST BEFORE PLACING INTO THE PLANTING PIT. DO NOT "TEASE
- ROOTS OUT FROM THE ROOTBALL.
 INSTALL THE TREE ON UNDISTURBED SUBGRADE SO THAT THE TOP OF THE ROOTBALL IS TWO TO FOUR INCHES ABOVE THE SURROUNDING GRADE.
- FOUR INCHES ABOVE THE SURROUNDING GRADE
 BACKFILL THE TREE HOLE UTILIZING THE EXISTING TOPSOIL FROM ON-SITE. ROCKS LARGER THAN
 1" DIA. AND ALL OTHER DEBRIS SHALL BE REMOVED FROM THE SOIL PRIOR TO THE BACKFILL.
 SHOULD ADDITIONAL SOIL BE REQUIRED TO ACCOMPLISH THIS TASK, USE STORED TOPSOIL FROM
 ON-SITE OR IMPORT ADDITIONAL TOPSOIL FROM OF-SITE AT NO ADDITIONAL COST TO THE OWNER.
 IMPORTED TOPSOIL SHALL BE OF SIMILAR TEXTURAL CLASS AND COMPOSITION IN THE ON-SITE
 SOIL
- SOIL.
 THE TOTAL NUMBER OF TREE STAKES (BEYOND THE MINIMUMS LISTED BELOW) WILL BE LEFT TO THE LANDSCAPE CONTRACTOR'S DISCRETION. SHOULD ANY TREES FALL OR LEAN, THE LANDSCAPE CONTRACTOR SHALL STRAIGHTEN THE TREE, OR REPLACE IT SHOULD IT BECOME DAMAGED. TREE STAKING SHALL ADHERE TO THE FOLLOWING GUIDELINES:

 a. 1*-2" TREES

 TWO STAKES PER TREE
- 2-1/2"-4" TREES THREE STAKES PER TREE
- TREES OVER 4" CALIPER GUY AS NEEDED
- MULTI-TRUNK TREES THREE STAKES PER TREE MINIMUM, QUANTITY AND POSITIONS
- AS NEEDED TO STABILIZE THE TREE
- AS NEEDED TO STABILIZE THE TREE
 UPON COMPLETION OF PLANTING, CONSTRUCT AN EARTH WATERING BASIN AROUND THE TREE.
 COVER THE INTERIOR OF THE TREE RING WITH THE WEED BARRIER CLOTH AND TOPDRESS WITH
 MULCH (TYPE AND DEPTH PER PLANS).
 IRB. PERENNIAL, AND GROUNDCOVER PLANTING
 DIG THE PLANTING HOLES TWICE AS WIDE AND 2" LESS DEEP THAN EACH PLANT'S ROOTBALL
 INSTALL THE PLANT IN THE HOLE. BACKFILL AROUND THE PLANT WITH SOIL AMENDED PER SOIL
 TEST RECOMMENDATIONS.
 INSTALL THE WEED BARRIER CLOTH, OVERLAPPING IT AT THE ENDS. UTILIZE STEEL STAPLES TO
 KEEP THE WEED BARRIER CLOTH IN PLACE.
 WHEN PLANTING IS COMPLETE, INSTALL MULCH (TYPE AND DEPTH PER PLANS) OVER ALL PLANTING
 BEDS, COVERING THE ENTIRE PLANTING AREA.
- BEDS, COVERING THE ENTIRE PLANTING AREA.
- SODDING SOD VARIETY TO BE AS SPECIFIED ON THE LANDSCAPE PLAN.
- SUD VARIE! IT I UP AS SPECIFIED ON THE LANDSCAPE PLAN.

 LAY SOD WITHIN 24 HOURS FROM THE TIME OF STRIPPING. DO NOT LAY IF THE GROUND IS FROZEN.

 LAY THE SOD TO FORM A SOLID MASS WITH TIGHTLY FITTED JOINTS. BUTT ENDS AND SIDES OF
 SOD STRIPS DO NOT OVERLAP. STAGEGRE STRIPS TO OFFSET JOINTS IN ADJACENT COURSES. ROLL THE SOD TO ENSURE GOOD CONTACT OF THE SOD'S ROOT SYSTEM WITH THE SOIL UNDERNEATH.
- WATER THE SOD THOROUGHLY WITH A FINE SPRAY IMMEDIATELY AFTER PLANTING TO OBTAIN AT LEAST SIX INCHES OF PENETRATION INTO THE SOIL BELOW THE SOD.
- CLEAN UP

 1. DURING LANDSCAPE PREPARATION AND PLANTING, KEEP ALL PAVEMENT CLEAN AND ALL WORK
- AREAS IN A NEAT, ORDERLY CONDITION.

 DISPOSED LEGALLY OF ALL EXCAVATED MATERIALS OFF THE PROJECT SITE.
- INSPECTION AND ACCEPTANCE UPON COMPLETION OF THE WORK, THE LANDSCAPE CONTRACTOR SHALL PROVIDE THE SITE CLEAN, FREE OF DEBRIS AND TRASH, AND SUITABLE FOR USE AS INTENDED. THE LANDSCAPE CONTRACTOR SHALL THEN REQUEST AN INSPECTION BY THE OWNER TO DETERMINE FINAL ACCEPTABILITY.
- WHEN THE INSPECTED PLANTING WORK DOES NOT COMPLY WITH THE CONTRACT DOCUMENTS
- ACCEPTABILITY

 2. WHEN THE INSPECTED PLANTING WORK DOES NOT COMPLY WITH THE CONTRACT DOCUMENTS, THE LANDSCAPE CONTRACTOR SHALL REPLACE AND/OR REPAIR THE REJECTED WORK TO THE OWNERS SATISFACTION WITHIN 24 HOURS.

 3. THE LANDSCAPE MAINTENANCE PERIOD WILL NOT COMMENCE UNTIL THE LANDSCAPE WORK HAS BEEN RE-INSPECTED BY THE OWNER AND FOUND TO BE ACCEPTABLE. AT THAT TIME, A WRITTEN NOTICE OF FINAL ACCEPTANCE WILL BE ISSUED BY THE OWNER, AND THE MAINTENANCE AND GUARANTEE PERIODS WILL COMMENCE.


 1. THE LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR THE MAINTENANCE OF ALL WORK SHOWN ON THESE PLANS FOR 90 DAYS BEYOND FINAL ACCEPTANCE OF ALL LANDSCAPE WORK BY THE OWNER. LANDSCAPE MAINTENANCE SHALL INCLUDE WEEKLY SITE VISITS FOR THE FOLLOWING ACTIONS (AS APPROPRIATE): PROPER PRIVINING, RESTAKING OF TREES, RESEITING OF PLANTS THAT HAVE SETTLED, MOWING AND AERATION OF LAWNS, WEEDING, RESSEDING AREAS WHICH HAVE NOT GERMINATED WELL, TREATING FOR INSECTS AND DISEASES REPLACEMENT OF MULCH, REMOVAL OF LITTER, REPAIRS TO THE IRRIGATION SYSTEM DUE TO FAULTY PARTS ANDIOR WORKMANSHIP, AND THE APPROPRIATE WATERING OF ALL PUANTINGS. THE LANDSCAPE CONTRACTOR SHALL MAINTAIN THE IRRIGATION SYSTEM DUE TO FAULTY PARTS ANDIOR WORKMANSHIP AND THE APPROPRIATE WATERING OF ALL PUANTINGS. THE LANDSCAPE CONTRACTOR SHALL MAINTAIN THE IRRIGATION SYSTEM IN PROPER WORKING ORDER, WITH SCHEDULING ADJUSTMENTS BY SEASON TO MAXIMIZE WATER CONSERVATION.

 2. SHOULD SEEDED AND/OR SOODED AREAS NOT BE RESPONSIBLE FOR WARRING THESE AREAS AND OBTAININGS A DULL, HEALTHY STAND OF GRASS AT NO ADDITIONAL COST TO THE OWNER.

 3. TO ACHIEVE FINAL ACCEPTANCE AT THE END OF THE MAINTENANCE PERIOD, ALL OF THE FOLLOWING CONDITIONS MUST COCUR.

 2. THE LANDSCAPE SHALL SHOW ACTIVE, HEALTHY GROWTH (WITH EXCEPTIONS MADE FOR SEASONAL DORMANCY). ALL PLANTS NOT MEETING THIS CONDITION SHALL BE REJECTED AND REPLACED BY HEALTHY PLANT MATERIAL PRIOR TO FINAL ACCEPTANCE.

 3. ALL HARDSCAPE SHALL BE CLEANED PRIOR TO FINAL ACCEPTANCE.
- AND REPLACED BY HEALTHY PLANT MATERIAL PRIOR TO FINAL ACCEPTANCE.
- ALL HARDSCAPE SHALL BE CLEANED PRIOR TO FINAL ACCEPTANCE. SODDED AREAS MUST BE ACTIVELY GROWING AND MUST REACH A MINIMUM HEIGHT OF 1.1/2 INCHES BEFORE FIRST MOWING. HYDROMULCHED AREAS SHALL SHOW ACTIVE, HEALTHY GROWTH. BARE AREAS LARGER THAN TWELVE SQUARE INCHES MUST BE RESODDED OR RESEEDED (AS APPROPRIATE) PRIOR TO FINAL ACCEPTANCE. ALL SODDED TURF SHALL BE
- WARRANTY PERIOD PLANT GUARANTEE AND REPLACEMENTS
- RRANTY PERIOD, PLANT GUARANTEE AND REPLACEMENTS
 THE LANDSCAPE CONTRACTOR SHALL GUARANTEE ALL TREES, SHRUBS, PERENNIALS, SOD,
 SEEDEDIHYDROMULCHED AREAS, AND IRRIGATION SYSTEMS FOR A PERIOD OF ONE YEAR FROM
 THE DATE OF THE OWNER'S FINAL ACCEPTANCE (90 DAYS FOR ANNUAL PLANTS). THE
 CONTRACTOR SHALL REPLACE, AT HIS OWN EXPENSE AND TO THE SATISFACTION OF THE OWNER,
 ANY PLANTS WHICH DIE IN THAT TIME, OR REPAIR ANY PORTIONS OF THE IRRIGATION SYSTEM
 WHICH OPERATE IMPROPERLY.
 AFTER THE INITIAL MAINTENANCE PERIOD AND DURING THE GUARANTEE PERIOD, THE LANDSCAPE
 CONTRACTOR SHALL ONLY SE DESPONSIBLE FOR DEPLACEMENT OF PLANTS WHEN PLANT DEATH
- CONTRACTOR SHALL ONLY BE RESPONSIBLE FOR REPLACEMENT OF PLANTS WHEN PLANT DEATH CANNOT BE ATTRIBUTED DIRECTLY TO OVERWATERING OR OTHER DAMAGE BY HUMAN ACTIONS. PROVIDE A MINIMUM OF (2) COPIES OF RECORD DRAWINGS TO THE OWNER UPON COMPLETION OF
- WORK, A RECORD DRAWING IS A RECORD OF ALL CHANGES THAT OCCURRED IN THE FIFLD AND THAT ARE DOCUMENTED THROUGH CHANGE ORDERS, ADDENDA, OR CONTRACTOR/CONSULTANT DRAWING



- ROLLED-TOP STEEL EDGING PER PLANS.
- 2 TAPERED STEEL STAKES
- MULCH, TYPE AND DEPTH PER PLANS.


- OTES:
) INSTALL EDGING SO THAT STAKES WILL BE ON INSIDE OF PLANTING BED
) BOTTOM OF EDGING SHALL BE BURIED A MINIMUM OF 1" BELOW FINISH (
) TOP OF MULCH SHALL BE 1" LOWER THAN TOP OF EDGING.


DISTANCE PER PLAN

- STEEL EDGING


D

Ε





TREE PLANTING



(13) FINISH GRADE.

MOTES

1. SCARRY SIDES OF PLANTING PIT PRIOR TO SETTING TREE.
1. SCARRY SIDES OF PLANTING PIT PRIOR TO SETTING TREE.
1. SCARRY SIDES SOIL APPLIED ON TOP OF THE ROOTBALL THAT
COVERS THE ROOT FLARE. THE PLANTING HOLE DEPTH SHALL BE
SUCH THAT THE ROOTBALL RESTS ON UNDISTURBED SOIL, AND THE
ROOT FLARE IS 2"4" ABOVE PINISHI GRADE.
3. FOR BAB TREES, CUT OFF BOTTOM 13 OF WINE BASKET BEFORE
PLACING TREE IN HOLE. CUT OFF AND REMOVE REMANIDER OF
BASKET AFTER TREE IS SET IN HOLE. REMOVE ALL NYLON TIES,
TWINE, ROPE, AND OTHER PACKING MATERIAL, REMOVE AS MUCH
4. REMOVE ALL NURSERY STAYES AFTER PLANTING.
4. FREMOVE ALL NURSERY STAYES AFTER PLANTING.
5. FOR TREES 3"BOX25" CALL AND LARGER, USE THREE STAKES OR
DEADMEN (AS APPROPRIATE), SPACED EVENLY AROUND TREE.
5. STAKING SHALL BE TIGHT ENOUGH TO PREVENT TRUNK FROM
BENDING, BUT LOOSE ENOUGH TO ALLOW SOME TRUNK MOVEMENT
IN WIND.

IND LARGER). SECURE TIES OR STRAPS TO TRUNK

GREEN STEEL T-POSTS. EXTEND POSTS 12" MIN. INTO UNDISTURBED SOIL.

PRESSURE-TREATED WOOD DEADMAN, TWO PER TREE (MIN.). BURY OUTSIDE OF PLANTING PIT AND

3 24" X 3/4" P.V.C. MARKERS OVER WIRES.

18" MIN. INTO UNDISTURBED SOIL.

7 MULCH, TYPE AND DEPTH PER PLANS. DO NOT PLACE MULCH WITHIN 6" OF TRUNK.

10 BACKFILL. AMEND AND FERTILIZE ONLY AS RECOMMENDED IN SOIL FERTILITY ANALYSIS.


(6) TRUNK FLARE.

8 FINISH GRADE.

(11) UNDISTURBED NATIVE SOIL.


(12) 4" HIGH EARTHEN WATERING BASIN

9 ROOT BALL



- SHRUB, PERENNIAL, OR ORNAMENTAL GRASS.
- (3) FINISH GRADE
- (4) ROOT BALL
- 5 BACKFILL. AMEND AND FERTILIZE ONLY AS RECOMMENDED IN SOIL FERTILITY ANALYSI
- (6) UNDISTURBED NATIVE SOIL.
- (7) 3" HIGH EARTHEN WATERING BASIN.
- (8) WEED FABRIC UNDER MULCH.

SHRUB AND GROUNDCOVER PLANTING

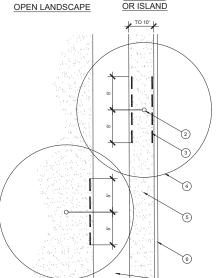

PLANTING AT PARKING AREA

PARKWAY

 TYPICAL WALKWAY OR PAVING TREE TRUNK

(1) CURB.

3 PLANT

2 MULCH LAYER.

4 TURF (WHERE SHOWN ON PLAN

LINEAR ROOT BARRIER MATERIAL SEE

- TYPICAL CURB AND GUTTER

NOTES:

NEMLY-PLANTED TREES NEAR ALL
NEWLY-PLANTED TREES THAT ARE LOCATED
WITHIN FUYE (5) FEET OF PAVING OR CURBS.

BARRIERS SHALL BE LOCATED IMMEDIATELY
ADJACENT TO HARDSCAPE UNDER NO
CIRCUMSTANCES SHALL THE CONTRACTOR
USE ROOT BARRIERS OF A TYPE THAT
COMPLETELY ENCIRCLE THE ROOTBALL

ROOT BARRIER - PLAN VIEW

EVERGREEN 15455 Dallas Pkwy., Ste 600 Addison, TX 75001

TBM #1- X CUT ON EX STORM INLET IN RUFE SNOW DR. APPX 60' NORTH AND 19' EAST OF NORTHERNMOST SOUTHEASTERN PROPERTY CORNER. ELEV: 629.02 TBM #2- X CUT ON EX CURB IN LEWIS DR. APPX

39' WEST AND 20' SOUTH OF SOUTHERWESTERN PROPERT CORNER. ELEV: 632.96

CASE SUP 2021-04

PLANTING I AND

LP-2

COFFEE S


ENGINEERING

AY

OTHER 5205 RUFE SNOW NORTH RICHLAND I BR

FING DETAILS PECIFICATIONS

D A .

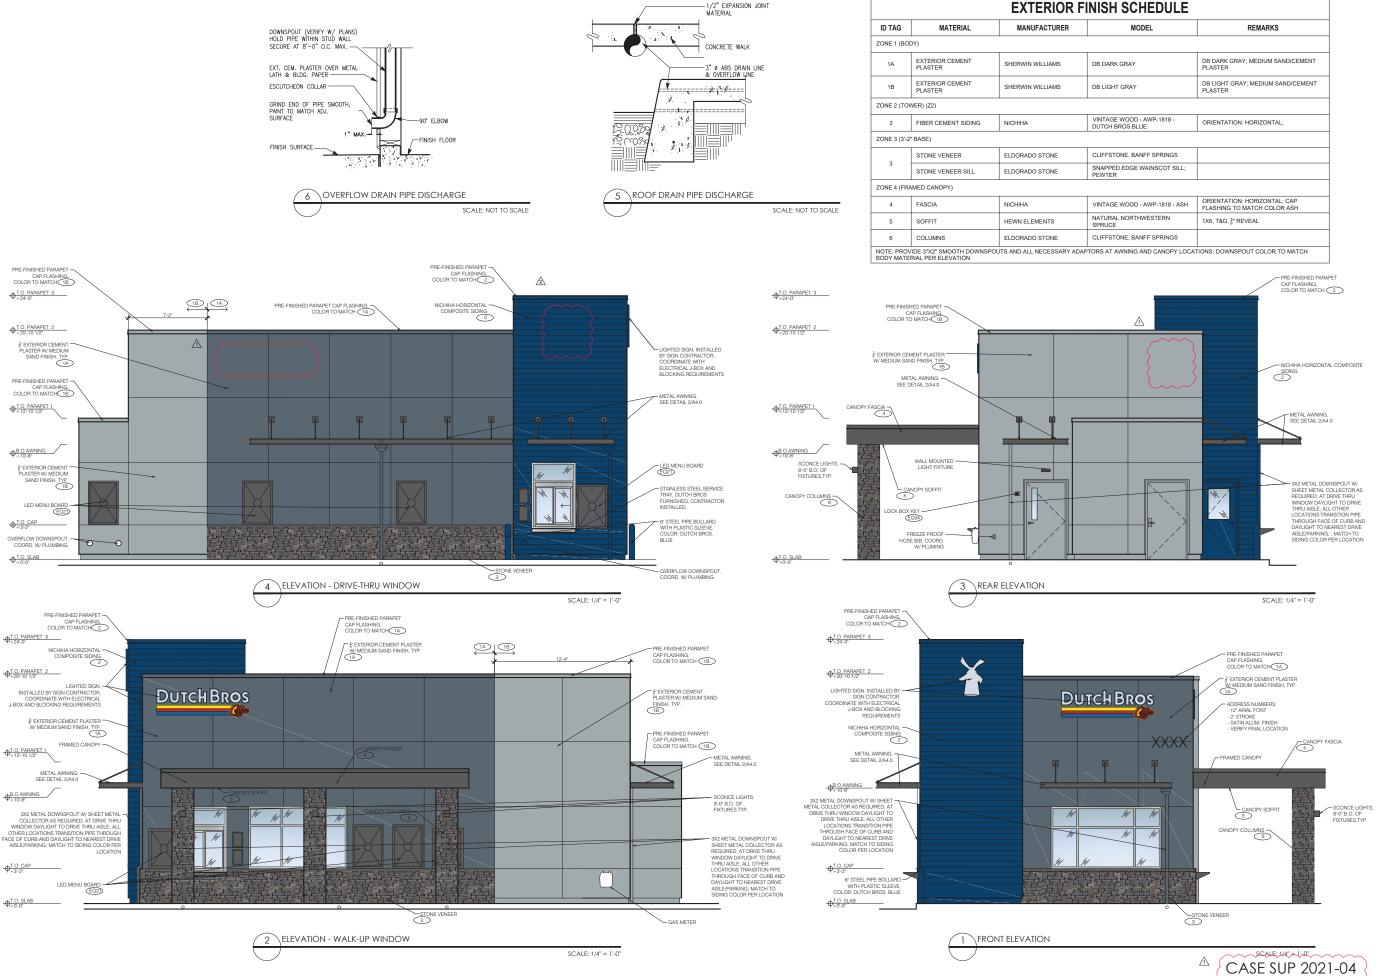

-1/2" EXPANSION JOINT

DUTCH BROS

ARMÉT DAVIS NEWLOVE & ASSOCIATES, AIA ARCHITECTS

THE USE OF THESE PLANS AND SPECIFICATIONS SHALL BE RESTRICTED TO THE ORGANIA. SITE FOR WHICH THEY WERE PREPARED AND PROLICION THESEOF IS DEPRESSEY MAINTED TO SIGHT USE, RE-USE, REPRODUCTION OF PUBLICATION OF TO SHAPE AND STEPHEN OF PUBLICATION OF PUBLICATION OF PUBLICATION OF PUBLICATION SHAPE AND STEPHEN WHICH SHAPES WERE SHAPES WITH THESE PUBLIS AND SPECIFICATIONS SHALL CONSTRUCT WHITH THESE PUBLIS AND SPECIFICATIONS SHALL CONSTRUCT WHITH THESE PUBLIS AND SPECIFICATIONS SHALL CONSTRUCT WERE PUBLISHED OF THE RESTRICTIONS.



Store g 1402 v Freestan Z [≥] Z Project No: 1 Dutch Bros Coffee - N 2550 - A1 PROTOTYPE ☐ ijs, Snow Iland I Rufe Rich


DATE: 03/26/2021 REV: DATE: DESCRIPTION: 1 04/02/21 SUP RESUBMITTAL

SHEET NAME: **BUILDING ELEVATIONS**

COLOR SHEET NUMBER:

A6.1

© 2019 DB Franchising USA, LLC

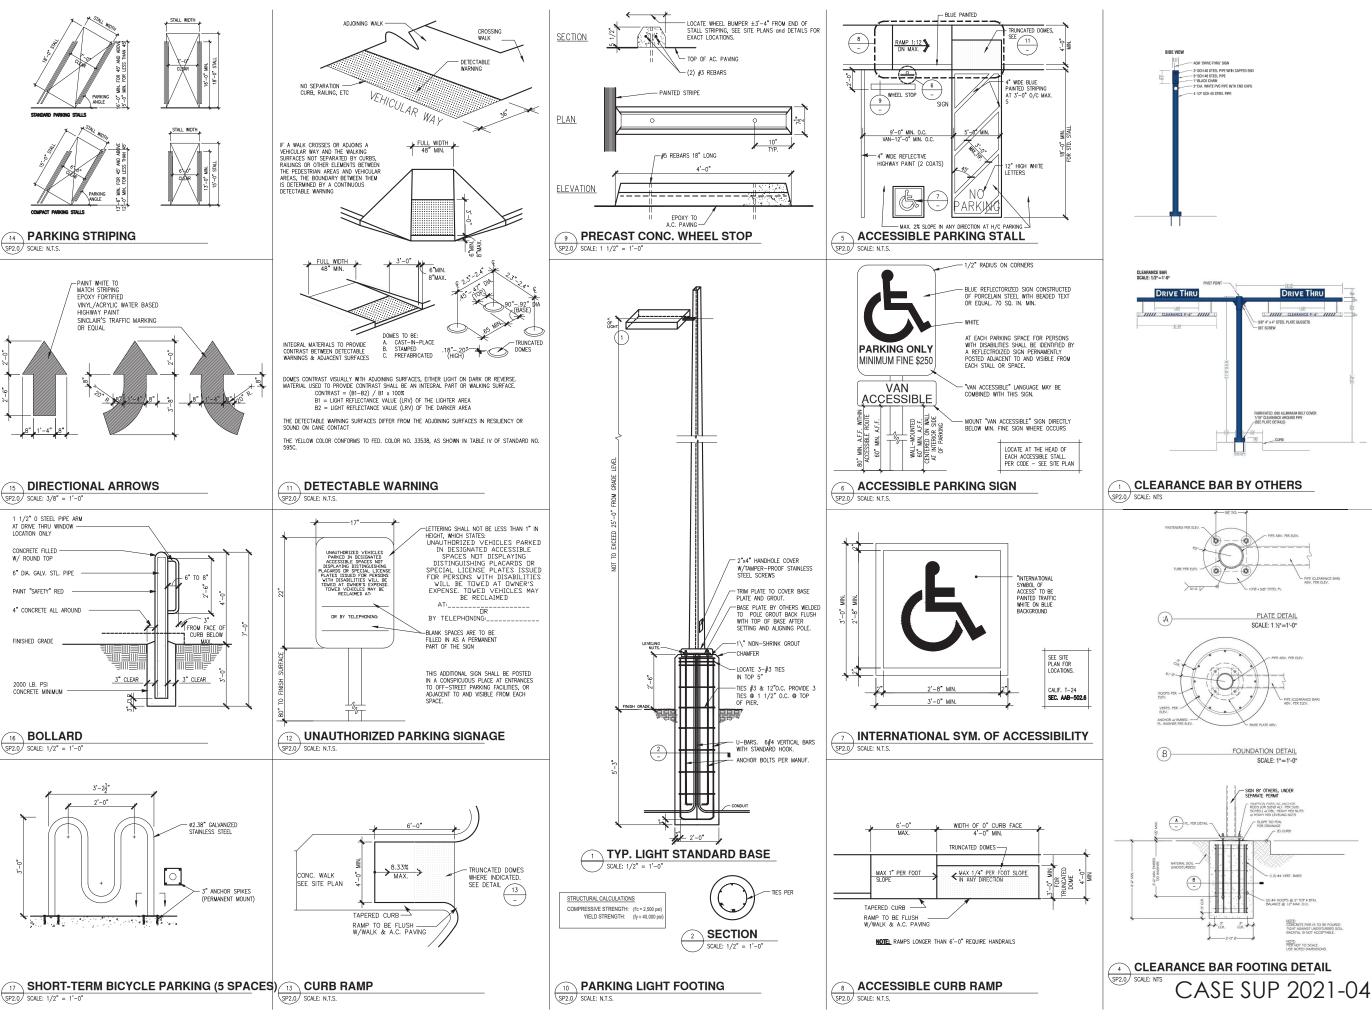

DUTCH BROS

ARMÉT DAVIS NEWLOVE & ASSOCIATES, AIA ARCHITECTS

1330 OLYMPIC BLVD. SANTA MONICA, CALIFORNIA 90404 PH 310 452-5533 FAX 310 450-4742

THE USE OF THESE PLANS AND SPECIFICATIONS SHALL BESTINGTICE TO THE ORIGINAL SHE FOR WHALL HERY WERE PREPARED AND PULLULIATION THESE IS SPRESSEY LIMIT TO SUCH USE, RE-USE, REPRODUCTION OF PUBLICATION TO SUCH USE, RE-USE, REPRODUCTION OF PUBLICATION TO SUCH USE, RE-USE, REPRODUCTION OF PUBLICATION TO THE PLANS AND SECRETARION OF PUBLICATION THE PUBLICATION OF SHALL CONTACT WHITH THE SPHEMS AND SECRETARION SHALL CONTACT WHITH THE SPHEMS AND SECRETARION SHALL CONTACT WHITH THE SHALL SECRETARION SHALL CONTINUE FINE PUBLICATION OF THE RESTRICTIONS.




Store

g

400

.. 2



CLEARANCE BAR FOOTING DETAIL

ject No: n Bros Coffee -Al PROTOTYPE Rufe Rich Proje Dutch | 2550 - A DATE: 03/26/2021 REV: DATE: DESCRIPTION: 1 04/02/21 SUP RESUBMITTAL SHEET NAME:

Ģ ∭,

SITE DETAILS

SHEFT NUMBER SP2.0